

① Desiccator lower parts, DURAN®

with flat flange, without connection, for lids of all types, DIN 12491.

DN	Order No.	DN	Order No.
100	12 24 77046	250	12 24 77066
150	12 24 77057	300	12 24 77069
200	12 24 77061		

② Desiccator lower parts, DURAN®

with flat flange, with standard ground (NS 24/29), tubulature, type NOVUS, DIN 12491.

DN	Order No.	DN	Order No.
100	12 24 77146	250	12 24 77166
150	12 24 77157	300	12 24 77169
200	12 24 77161		

③ Desiccator lower parts, DURAN®

with flat flange, threaded connection GL 32, type MOBILEX, DIN 12491.

DN	Order No.	DN	Order No.
150	12 24 77257	250	12 24 77266
200	12 24 77261	300	12 24 77269

④ Desiccator lower parts, DURAN®

with ring-grooved flange, suitable for all lids.

DN	Order No.
200	12 24 77361

⑤ Desiccator lids, DURAN®

with knob, suitable for all lower parts, DIN 12491.

DN	Order No.	DN	Order No.
100	12 24 41046	250	12 24 41066
150	12 24 41057	300	12 24 41069
200	12 24 41061		

⑥ Desiccator lids, DURAN®

with connecting tubulature NOVUS 24/29 for standard ground stopcocks, type NOVUS, DIN 12491.

DN	Order No.	DN	Order No.
100	12 24 42046	250	12 24 42066
150	12 24 42057	300	12 24 42069
200	12 24 42061		

⑦ Desiccator lids, DURAN®

with special tubulature 24/29 with groove, suitable for safety outlet type WERTEX.

DN	Order No.	DN	Order No.
150	12 24 43057	250	12 24 43066

⑧ Desiccator lids, DURAN®

with screw thread connection, type MOBILEX, DIN 12491.

DN	Order No.	DN	Order No.
150	12 24 44057	250	12 24 44066
200	12 24 44061	300	12 24 44069

O-rings

suitable for desiccators, made of silicone (VMQ), for articles since 1996.

DN	Order No.	DN	Order No.
150	12 29 21557	250	12 29 21566
200	12 29 21561		

⑨ O-rings

spare parts, suitable for desiccators, made of silicon (VMQ). $T_{max} = 200^{\circ}C$.

DN	Order No.	DN	Order No.
150	12 29 22457	250	12 29 22466
200	12 29 22460		

⑩ Screw cap, PBT

with pierced aperture for threaded connections, type MOBILEX

Thread GL	Order No.	PU pc/Pack
32	13 29 22708	10




- ⑪ **Seal with pierced aperture**
for MOBILEX threaded connectors.

Thread GL	Order No.	PU pc/Pack
32	13 29 23612	10



- ⑫ **Cap, PBT**
with seal for threaded connections, type MOBILEX

Thread GL	Order No.	PU pc/Pack
32	11 29 24019	10

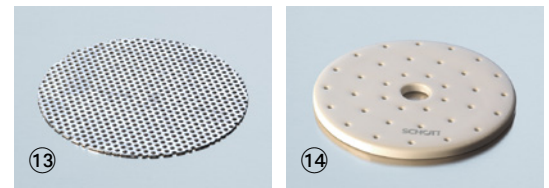

- ⑬ **Desiccator plates made of metal, DIN EN 10143**

DN	Order No.	DN	Order No.
100	12 29 08046	250	12 29 08066
150	12 29 08057	300	12 29 08069
200	12 29 08061		



- ⑭ **Desiccator plates made of porcelain**

DN	Order No.	DN	Order No.
100	12 29 72546	250	12 29 72566
150	12 29 72557	300	12 29 72569
200	12 29 72561		

- ⑮ **Stopcock with PTFE spindle**

With standard ground (NS) cone 24/29 for side tubulature.

for	Order No.
Type NOVUS	12 24 79803

- ⑯ **Stopcock with PTFE spindle**

With standard ground (NS) cone 24/29 for tubulature lid.

for	Order No.
Type NOVUS	12 24 79904

- ⑰ **Stopcock with PTFE spindle**

For threaded connectors.

for	Order No.
Type MOBILEX	12 24 79703

- ⑱ **Stopper with standard ground (NS) joint 24/29**

For safety connectors, typ WERTEX.

NS	Order No.
24/29	12 24 79603

